


## 20372S Series

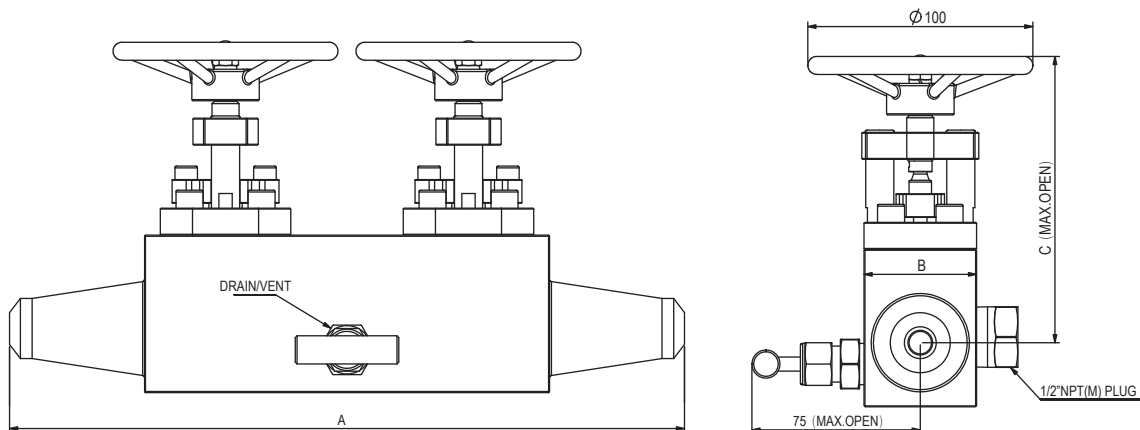

Basic Ordering Number	Connection Type and Size		Orifice (mm)	Cv	Dimensions(mm)		
	Inlet	Outlet			A	B	C
	Preweld Tube (Tube Socket Weld)	Preweld Tube (Tube Socket Weld)					
20372S-80214-	14mm TBW	14mm TBW	11.00	2.52	300.00	50.00	127.00
20372S-80216-	16mm TBW	16mm TBW					
20372S-80218-	18mm TBW	18mm TBW					
20372S-80220-	20mm TBW	20mm TBW					
20372S-80225-	25mm TBW	25mm TBW					
	Preweld Pipe (Pipe Butt Weld)	Preweld Pipe (Pipe Butt Weld)					
20372S-90108-	1/2" PBW	1/2" PBW	11.00	2.52	300.00	50.00	127.00
20372S-90112-	3/4" PBW	3/4" PBW					
20372S-90116-	1" PBW	1" PBW					

### Features

- Design standards are referenced ASME B16.34,API602,ASME B16.25,ASME B16.11.
- One-Piece body with two double PSB-BG-OS&Y globe valves and one piece needle valves.
- Disc faced with STL.
- Non-Rotating disc is standard.
- The valve has a compact structure and a small size. Compared to traditional valves, it is lighter in weight and does not require additional support.
- Measurement becomes more accurate.
- Installation is more convenient.
- Each handwheel can be replaced independently.

### Ordering Information

- Standard body material is 316 SS, and stem packing is PTFE for temperature services 250 °C, Class 2500.  
Add material designator designator as the suffix to the basic ordering number to get the complete ordering number.  
Example: 20372S-90112-B100
- To order Graphite stem packing for temperature services 648 °C, add a designator as a suffix to the ordering number.  
Example: 20372S-90112-B100-P30
- Contact the authorized representative or DECON if any request.

Material	Designator	Packing	Designator
316 SS	-B100	PTFE	-P10
304 SS	-B110	PEEK	-P20
321 SS	-B120	Graphite	-P30
Monel	-B270		